




HMI with 9.7" XGA TFT Display

Feature

- 9.7" 1024 x 768 TFT LCD
- Quad-core Cortex-A17 CPU with High Performance dedicated 3D Processor
- Fan-less Cooling System
- Built-in 4GB Flash Memory and RTC
- CAN Bus Supports CANopen Protocol
- COM2 / COM3 RS-485 2W Supports MPI 187.5K, please use one at a time.
- Built-in Power Isolator
- NEMA4/IP66 Compliant Front Panel
- Built-in EasyAccess 2.0 License

Display	Display	9.7" TFT
	Resolution	1024 x 768
	Brightness (cd/m ²)	350
	Contrast Ratio	500:1
	Backlight Type	LED
	Backlight Life Time	>30,000 hrs.
	Colors	262K
	LCD Viewing Angle (T/B/L/R)	60/70/70/70
Touch Panel	Pixel Pitch (mm)	0.192(H) x 0.192(V)
	Type	4-wire Resistive Type
Memory	Accuracy	Active Area Length(X)±2%, Width(Y)±2%
	Flash	4 GB
Processor	RAM	1 GB
	Processor	Quad-core RISC
I/O Port	SD Card Slot	N/A
	USB Host	USB 2.0 x 1
	USB Client	N/A
	Ethernet	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1
	COM Port	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	RS-485 Isolation	N/A
	CAN Bus	Yes
	HDMI	N/A
RTC	Audio Output	Built-in Mono Speaker
	RTC	Built-in
Power	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	1A@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	Yes
	Enclosure	Plastic
	Dimensions WxHxD	260.6 x 203.1 x 44.5 mm
	Panel Cutout	250 x 192 mm
	Weight	Approx. 1 kg
Environment	Mount	Panel mount, VESA mount 75 x 75 mm
	Protection Structure	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel
	Storage Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 50°C (32° ~ 122°F)
	Relative Humidity	10% ~ 90% (non-condensing)
Certificate	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
	Certificate	CE marked cULus Listed
Software	EasyBuilder Pro	V6.04.01 or later versions
	Weincloud	EasyAccess 2.0 (Built-in), Dashboard* (Optional)
	CODESYS*	Optional

Dimensions

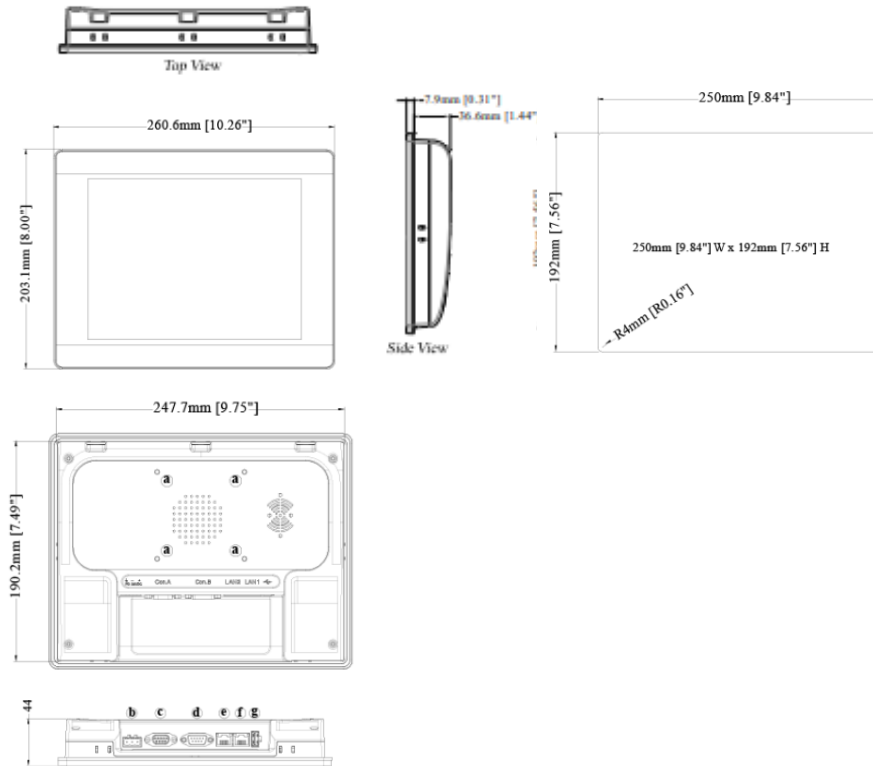

a	VESA 75 mm Screw Holes	e	LAN 2
b	Power Connector	f	LAN 1
c	COM2 RS-485, COM3 RS-485, CAN Bus (Con.A)	g	USB Host
d	COM1 RS-232, COM3 RS-232 (Con.B)		

Pin Assignment:

Con.B: COM1 / COM3 [RS232], 9 Pin, Male, D-sub

PIN#	COM1 [RS232]4W	COM3 [RS232]2W
1		
2	RxD	
3	TxD	
4		
5	GND	
6		
7	RTS	TxD
8	CTS	RxD
9	GND	

Con.A: COM2 / COM3 [RS485]/ CAN Bus, 9 Pin, Female, D-sub

PIN#	COM2 [RS485]2W	COM2 [RS485]4W	COM3 [RS485]2W	CAN Bus
1	Data-	Rx-		
2	Data+	Rx+		
3		Tx-		
4		Tx+		
5	GND			
6			Data-	
7				CAN_L
8				CAN_H
9			Data+	